

PATCHBOX

Tech Specs


patchbox.one / 8RU / Cat.6a




PATCHBOX® is the most innovative cabling system for network racks ever. The patchbox.one / 8RU with Cat.6a cables consists of a Frame, the Patchcatch – our ORU cable manager – and 24 Cable Cassettes with retractable flat cables inside. The cables are 0.8m long and cover up to 8RU – ideal for small wall cabinets. You can decide between UTP and STP shielding and eight different cable colours for better overview.




Items included

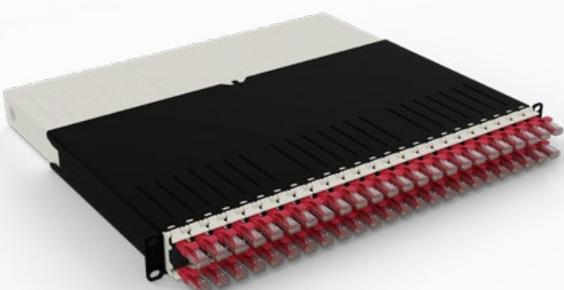


6 x Patchcatch



2 x /dev/mount incl. Hex Nuts



1 x Frame



24 x Cassette



Technical Information

STP Cable

Flat Cat.6a U/FTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG36, 100% stranded copper, PVC jacket, PoE (802.3af), RoHS compliant

UTP Cable

Flat Cat.6a U/UTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG30, 100% stranded copper, PVC jacket, PoE++ (802.3bt, Type 3 (60 W)), RoHS compliant

Connector Cat.6a

RJ45 shielded plug, pins gold plated, snagless booted

Cable Length

0.8 m / 2.6 ft cover 8RU

Frame

RAL9005 powder coated steel

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

6.7 kg / 14.77 lbs

Packaging Dimensions

Width: 587 mm Height: 55 mm Depth: 557 mm | Width: 23.11 in Height: 2.16 in Depth: 21.92 in


Custom Tariff Number

85444210

Width: 481.5 mm / 19 in

Depth: 365 mm / 14.37 in

Height: 44 mm / 1.73 in

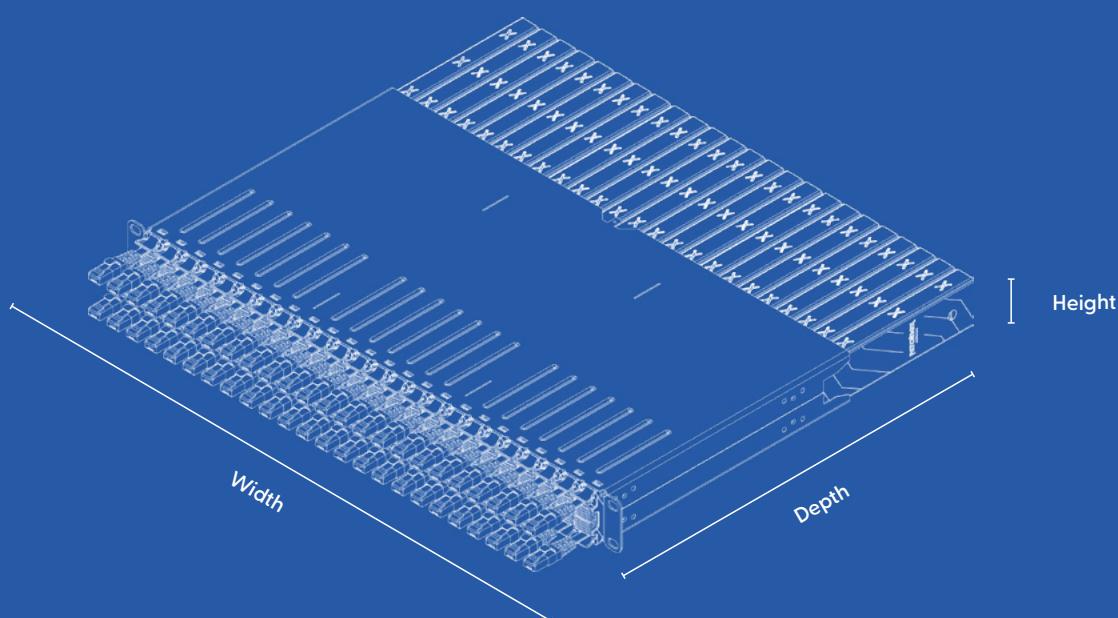


patchbox.one / 30RU / Cat.6a




PATCHBOX® is the most innovative cabling system for network racks ever. The patchbox.one / 30RU with Cat.6a cables consists of a Frame, Mounting Rails, the Patchcatch – our ORU cable manager – and 24 Cable Cassettes with retractable flat cables inside. The cables are 1.8m long and cover up to 30RU. You can decide between UTP and STP shielding and eight different cable colours for better overview.




Items included

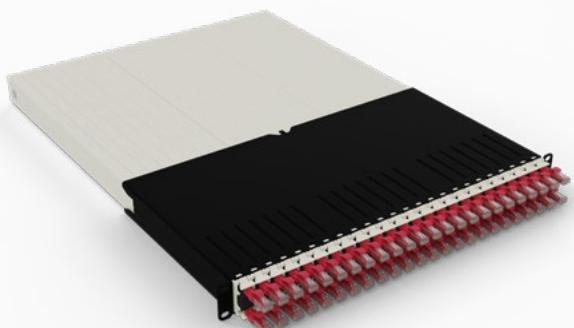

6 x Patchcatch



2 x Mounting Rails incl. Hex Nuts



1 x Frame



24 x Cassette



Technical Information

STP Cable

Flat Cat.6a U/FTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG36, 100% stranded copper, PVC jacket, PoE (802.3af), RoHS compliant

UTP Cable

Flat Cat.6a U/UTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG30, 100% stranded copper, PVC jacket, PoE++ (802.3bt, Type 3 (60 W)), RoHS compliant

Connector Cat.6a

RJ45 shielded plug, pins gold plated, snagless booted

Cable Length

1.8 m / 6 ft cover 30RU

Frame

RAL9005 powder coated steel

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Mounting Rails

Steel and RAL9005

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

8.56 kg / 18.87 lbs

Packaging Dimensions

Width: 799 mm Height: 55 mm Depth: 587 mm | Width: 31.45 in Height: 2.16 in Depth: 23.11 in


Custom Tariff Number

85444210

Width: 481.5 mm / 19 in

Depth: 600 mm / 23.62 in

Height: 44 mm / 1.73 in

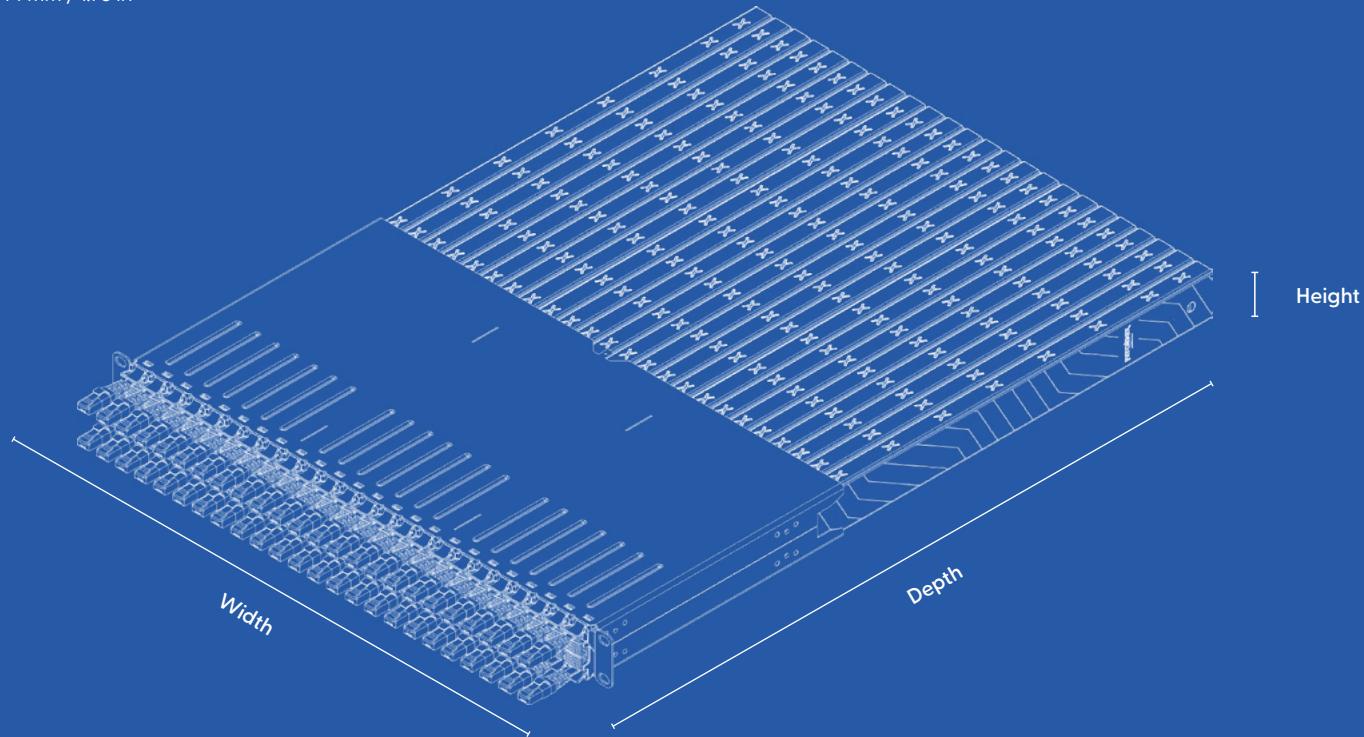

patchbox.one / 30RU / Fiber Optic




PATCHBOX is the most innovative cabling system for network racks ever. The patchbox.one / 30RU with Fiber Optic cables consists of a Frame, Mounting Rails, the Patchcatch – our ORU cable manager – and 24 Cable Cassettes with retractable cables inside. The cables are 1.8m long and cover up to 30RU. You can decide between OS2 and OM4 and LC-LC and LC-SC connectors.




Items included




6 x Patchcatch



2 x Mounting Rails incl. Hex Nuts



1x Frame



24 x Cassette



Technical Information LC-LC

O2 Cable

OS2 RBS 9 μ /125 μ , G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50 μ /125 μ , LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex – LC Duplex / LC Duplex – SC Duplex

Cable Length

1.8 m / 6 ft cover 30RU

Frame

RAL9005 powder coated steel

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Mounting Rails

Steel and RAL9005

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

8.56 kg / 18.87 lbs

Packaging Dimensions

Width: 799 mm Height: 55 mm Depth: 587 mm | Width: 31.45 in Height: 2.16 in Depth: 23.11 in


Custom Tariff Number

85447000

Width: 481.5 mm / 19 in

Depth: 600 mm / 23.62 in

Height: 44 mm / 1.73 in

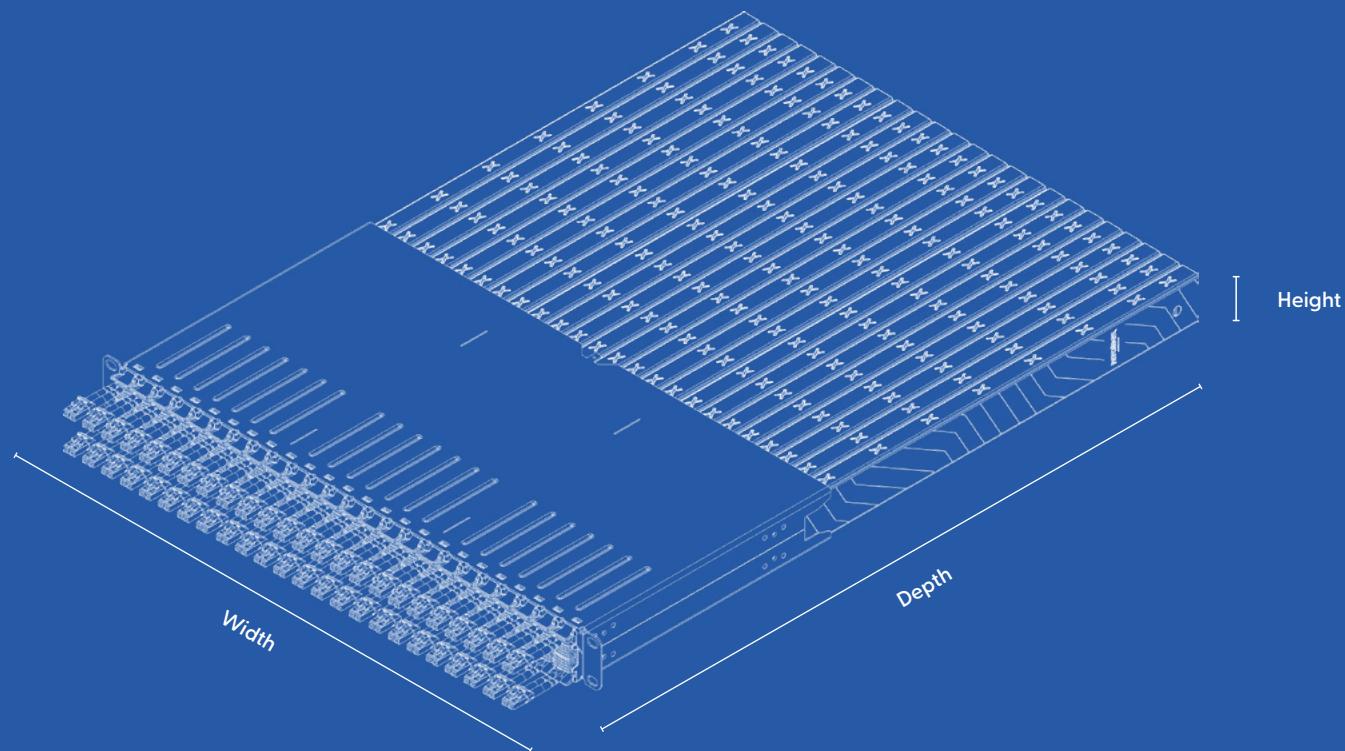

Technical Information LC-SC

O2 Cable

OS2 RBS 9 μ /125 μ , G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50 μ /125 μ , LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex – LC Duplex / LC Duplex – SC Duplex

Cable Length

1.8 m / 6 ft cover 30RU

Frame

RAL9005 powder coated steel

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Mounting Rails

Steel and RAL9005

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

8.56 kg / 18.87 lbs

Packaging Dimensions

Width: 799 mm Height: 55 mm Depth: 587 mm | Width: 31.45 in Height: 2.16 in Depth: 23.11 in


HS-Code

854 470


Width: 481.5 mm / 19 in

Depth: 600 mm / 23,62 in

Height: 44 mm / 1,73 in

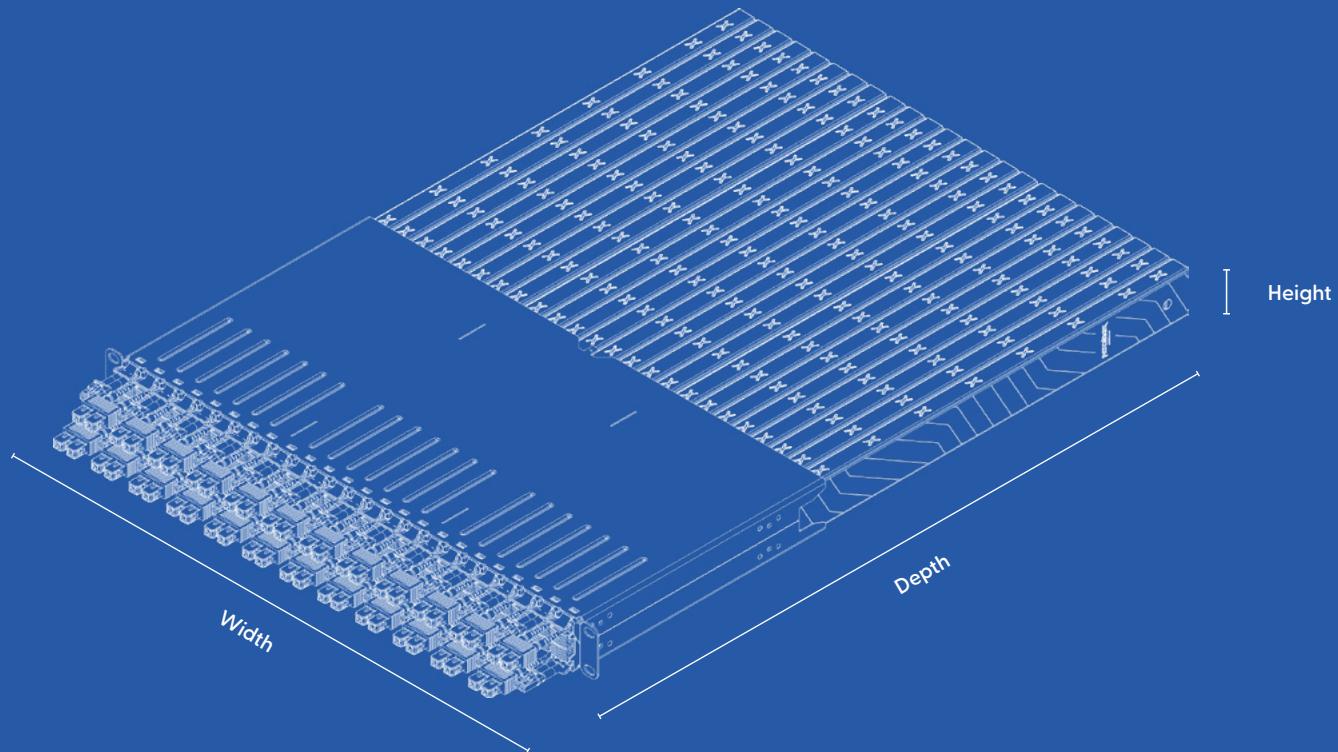


patchbox.one / Frame

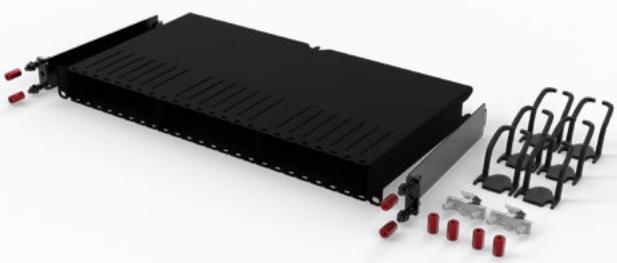


To build your own patchbox.one, you first need a Frame. It offers space for 24 Cable Cassettes, which can be easily replaced within seconds. You can choose from a range of cable types, cable colors, and connector types. The Frame is easily and quickly mounted and can be filled with different Cable Cassettes or Blind Panels to cover any unoccupied slots, making it completely modular.


Items included

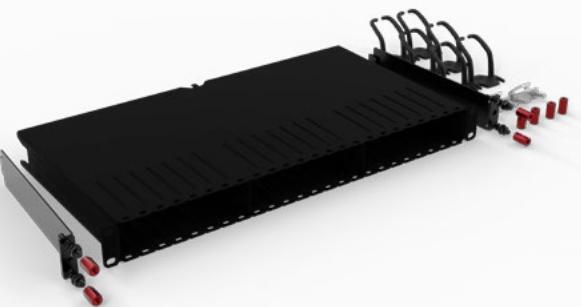


6 x Patchcatch



2 x /dev/mount incl. Hex Nuts



2 x Mounting Rails incl. Hex Nuts



1 x Frame



Technical Information

Frame

RAL9005 powder coated steel

Plastic Parts

Polyoxymethylene POM

Gross Weight

2.65 kg / 5.84 lbs

Mounting Rails

Steel and RAL9005

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Packaging Dimensions

Width: 520 mm Height: 50 mm Depth: 250 mm | Width: 20.47 in Height: 1.96 in Depth: 9.84 in


Custom Tariff Number

85447000

Width: 481 mm / 18.93 in

Depth: 240 mm / 9.44 in

Height: 50 mm / 1.96 in

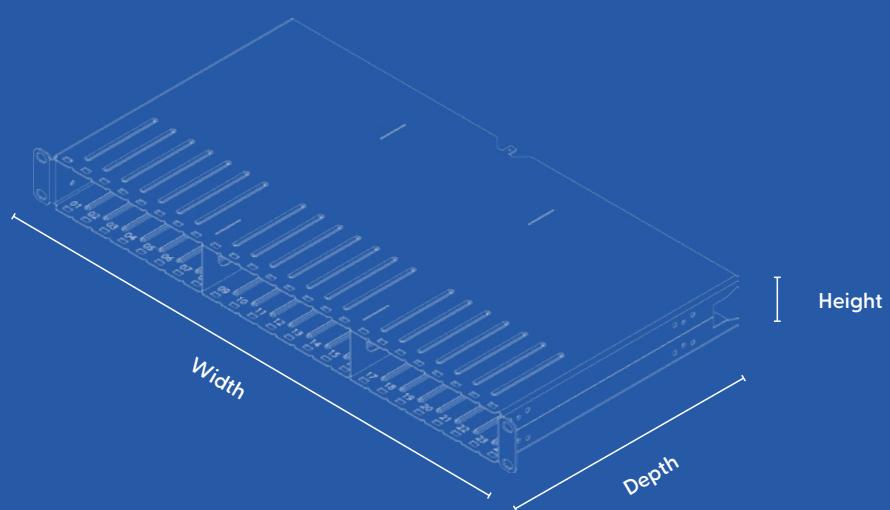

patchbox.one / Cassette / 8RU / Cat.6a

Build your own patchbox.one with various cable types and colours of your choice! The patchbox.one / Frame offers space for 24 Cable Cassettes. The flat Cat.6a cable inside patchbox.one / Cassette / 8RU is 0.8m long and covers up to 8RU. You can decide between UTP and STP shielding and eight different cable colours for better overview.



Items included



1x Cassette



Technical Information

STP Cable

Flat Cat.6a U/FTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG36, 100% stranded copper, PVC jacket, PoE (802.3af), RoHS compliant

UTP Cable

Flat Cat.6a U/UTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG36, 100% stranded copper, PVC jacket, PoE++ (802.3bt, Type 3 (60 W)), RoHS compliant

Connector Cat.6a

RJ45 shielded plug, pins gold plated, snagless booted

Cable Length

0.8 m / 2.6 ft cover 8RU

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.2 kg / 0.44 lbs

Packaging Dimensions

Width: 433 mm Height: 50 mm Depth: 28 mm | Width: 17.04 in Height: 1.96 in Depth: 1.10 in


Custom Tariff Number

85444210

Width: 18mm / 0.70 in

Height: 40mm / 1.57 in

Depth: 365 mm / 14.37 in

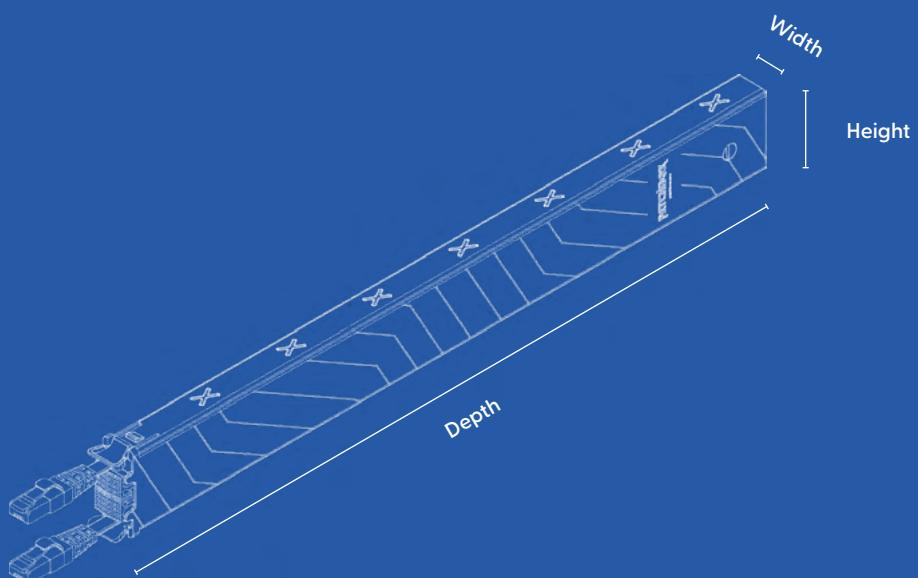

patchbox.one / Cassette / 8RU / Fiber Optic

Build your own patchbox.one with various cable types and colours of your choice! The patchbox.one / Frame offers space for 24 Cable Cassettes. The Fiber Optic cable inside patchbox.one / Cassette / 8RU is 0.8m long and covers up to 8RU. You can decide between OS2 and OM4 and LC-LC and LC-SC connectors.



Items included



1x Cassette



Technical Information LC-LC

OS2 Cable

OS2 RBS 9 μ /125 μ , G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50 μ /125 μ , LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex – LC Duplex / LC Duplex – SC Duplex

Cable Length

0.8 m / 2.6 ft cover 8RU

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.22 kg / 0.48 lbs

Packaging Dimensions

Width: 689 mm Height: 50 mm Depth: 47 mm | Width: 27.12 in Height: 1.96 in Depth: 1.85 in


Custom Tariff Number

85447000

Width: 18mm / 0.70 in

Height: 40mm / 1.57 in

Depth: 365 mm / 14.37 in

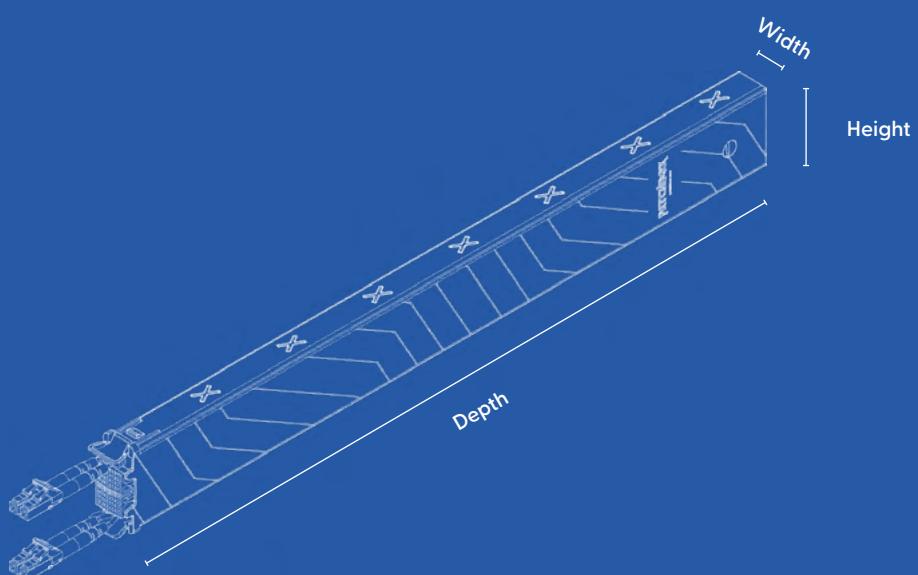

Technical Information LC-SC

OS2 Cable

OS2 RBS 9 μ /125 μ , G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50 μ /125 μ , LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex – LC Duplex / LC Duplex – SC Duplex

Cable Length

0.8 m / 2.6 ft cover 8RU

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.22 kg / 0.48 lbs

Packaging Dimensions

Width: 689 mm Height: 50 mm Depth: 47 mm | Width: 27.12 in Height: 1.96 in Depth: 1.85 in


Custom Tariff Number

85447000

Width: 18mm / 0.70 in

Height: 40mm / 1.57 in

Depth: 365 mm / 14.37 in

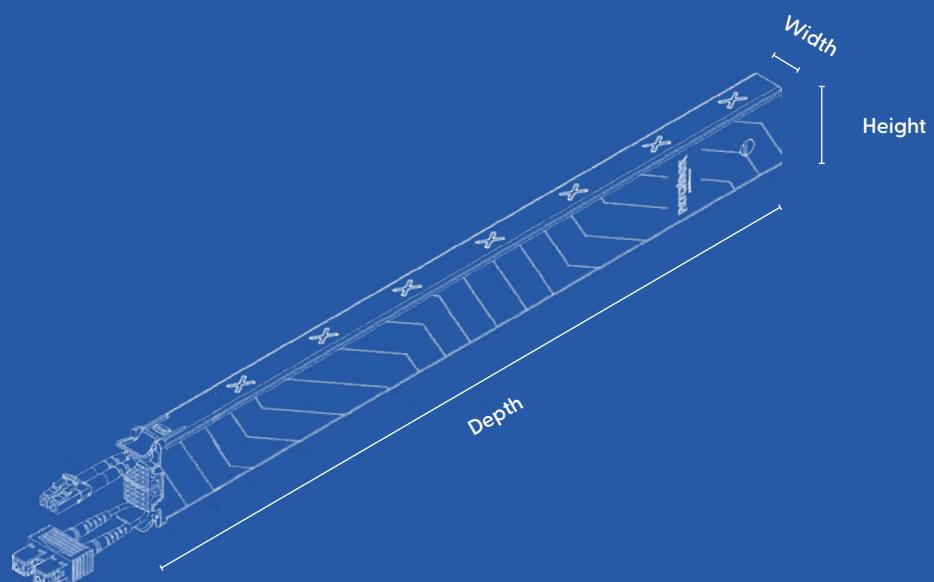


patchbox.one / Cassette / 30RU / Cat.6a

Build your own patchbox.one with various cable types and colours of your choice! The patchbox.one / Frame offers space for 24 Cable Cassettes. The flat Cat.6a cable inside patchbox.one / Cassette / 30RU is 1.8m long and covers up to 30RU. You can decide between UTP and STP shielding and eight different cable colours for better overview.



Items included



1x Cassette

Technical Information

STP Cable

Flat Cat.6a U/FTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG36, 100% stranded copper, PVC jacket, PoE (802.3af), RoHS compliant

UTP Cable

Flat Cat.6a U/UTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG36, 100% stranded copper, PVC jacket, PoE++ (802.3bt, Type 3 (60 W)), RoHS compliant

Connector Cat.6a

RJ45 shielded plug, pins gold plated, snagless booted

Cable Length

1.8 m / 6 ft cover 30RU

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.28 kg / 0.61 lbs

Packaging Dimensions

Width: 668 mm Height: 50 mm Depth: 28 mm | Width: 26.29 in Height: 1.96 in Depth: 1.10 in


Custom Tariff Number

85444210

Width: 18mm / 0.70 in

Height: 40mm / 1.57 in

Depth: 600 mm / 23.62 in

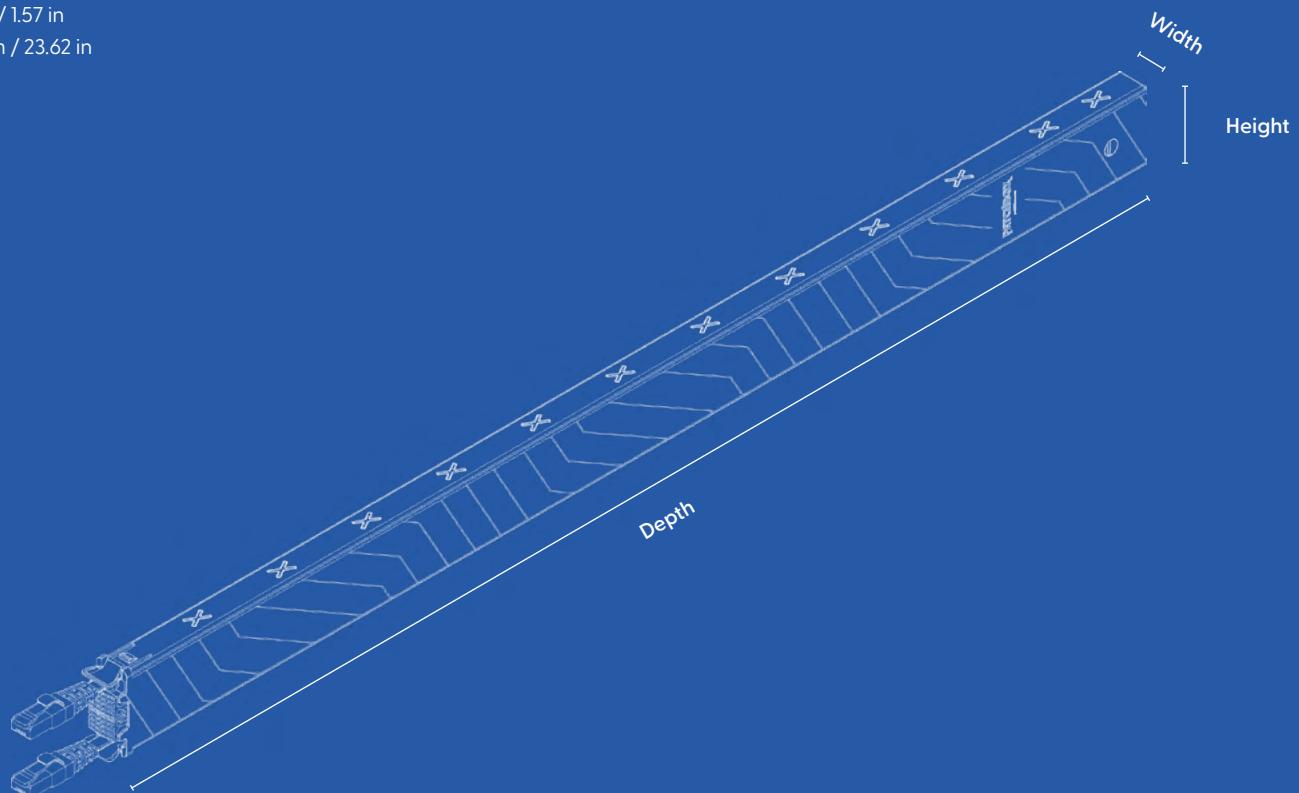

patchbox.one / Cassette / 30RU / Fiber Optic

Build your own patchbox.one with various cable types and colours of your choice! The patchbox.one / Frame offers space for 24 Cable Cassettes. The Fiber Optic cable inside patchbox.one / Cassette / 30RU is 1.8m long and covers up to 30RU. You can decide between OS2 and OM4 and LC-LC and LC-SC connectors.



Items included



24 x Cassette

Technical Information LC-LC

OS2 Cable

OS2 RBS 9 μ /125 μ , G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50 μ /125 μ , LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex – LC Duplex / LC Duplex – SC Duplex

Cable Length

1.8 m / 6 ft cover 30RU

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.27 kg / 0.59 lbs

Packaging Dimensions

Width: 689 mm Height: 50 mm Depth: 47 mm | Width: 27.12 in Height: 1.96 in Depth: 1.85 in


Custom Tariff Number

85447000

Width: 18mm / 0.70 in

Height: 40mm / 1.57 in

Depth: 600 mm / 23.62 in

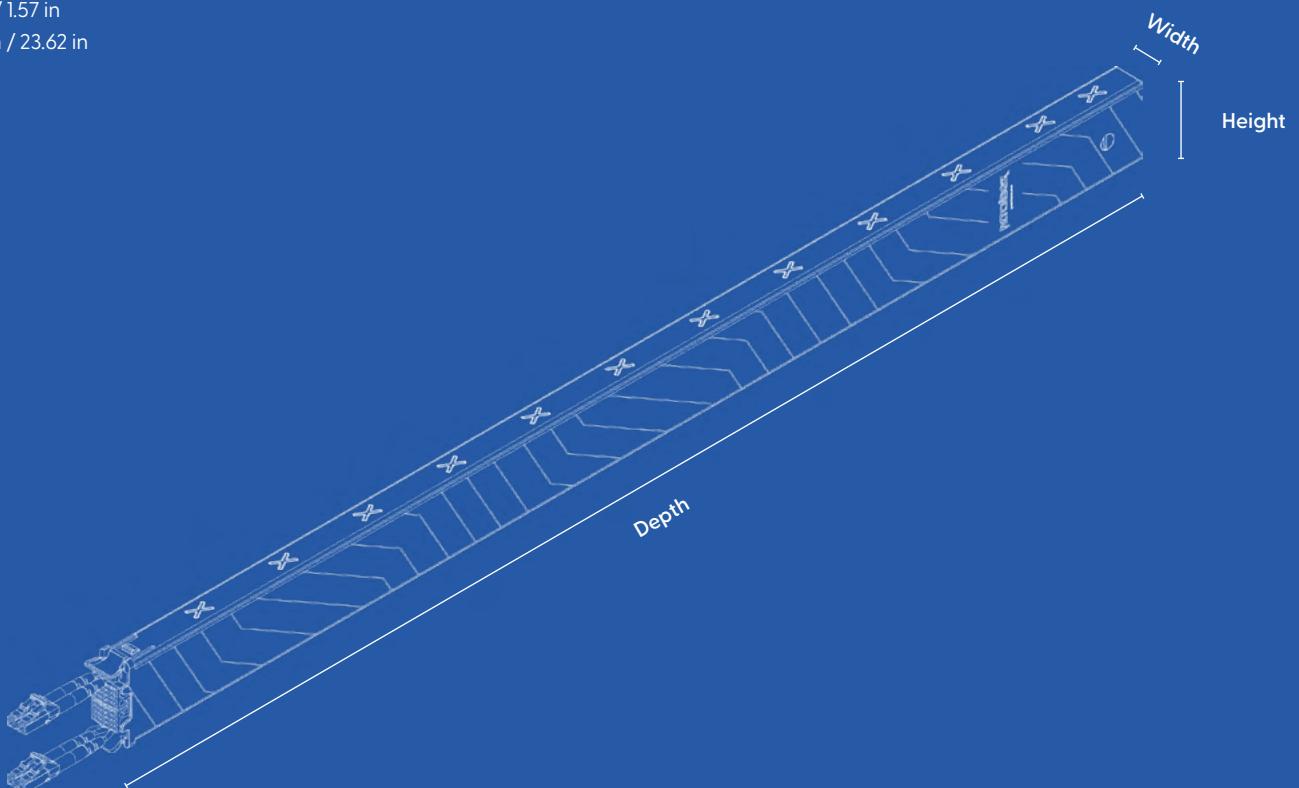

Technical Information LC-SC

OS2 Cable

OS2 RBS 9 μ /125 μ , G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50 μ /125 μ , LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex – LC Duplex / LC Duplex – SC Duplex

Cable Length

1.8 m / 6 ft cover 30RU

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.27 kg / 0.59 lbs

Packaging Dimensions

Width: 689 mm Height: 50 mm Depth: 47 mm | Width: 27.12 in Height: 1.96 in Depth: 1.85 in


Custom Tariff Number

85447000

Width: 18mm / 0.70 in

Height: 40mm / 1.57 in

Depth: 600 mm / 23.62 in

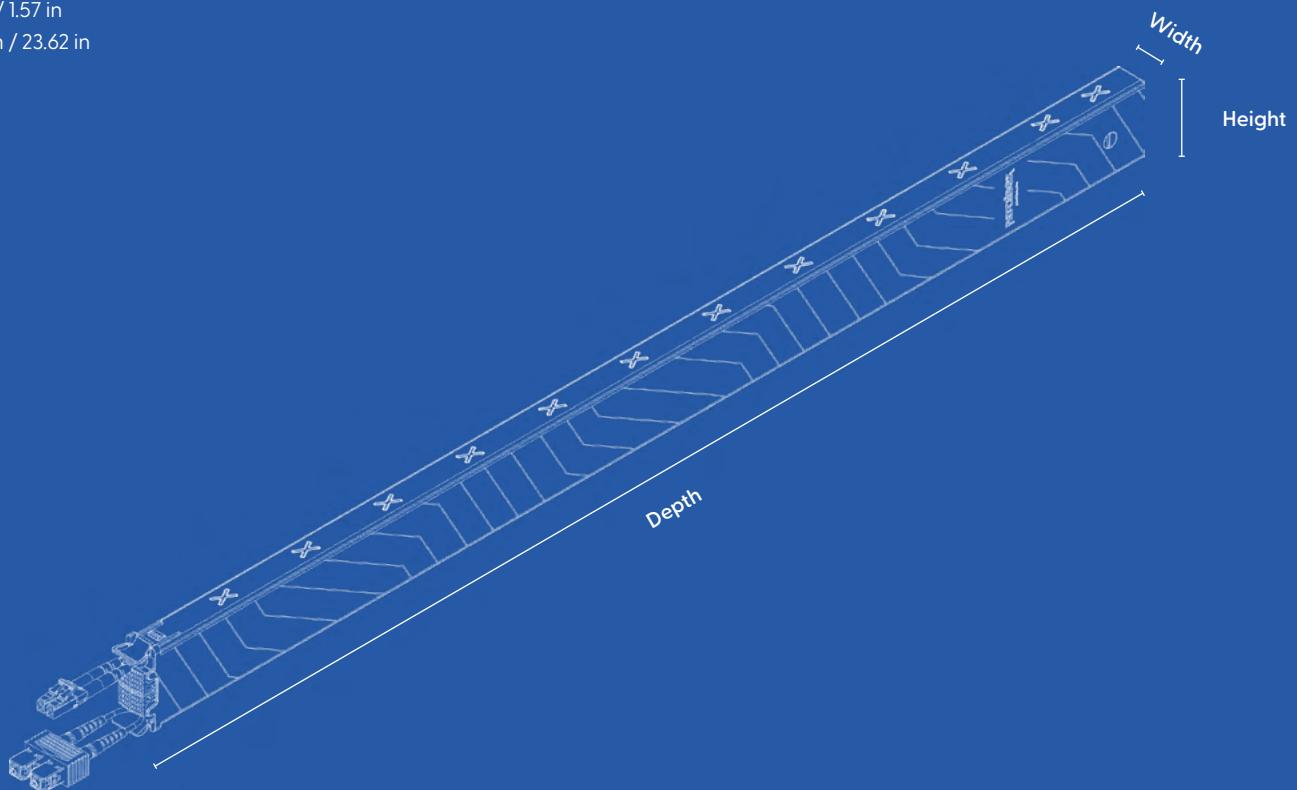


patchbox.one / Cassette / 46RU / Cat.6a

Build your own patchbox.one with various cable types and colours of your choice! The patchbox.one / Frame offers space for 24 Cable Cassettes. The flat Cat.6a cable inside patchbox.one / Cassette / 46RU is 2.5m long and covers up to 46RU. You can decide between UTP and STP shielding and eight different cable colours for better overview.



Items included



24 x Cassette

Technical Information

STP Cable

Flat Cat.6a U/FTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG36, 100% stranded copper, PVC jacket, PoE (802.3af), RoHS compliant

UTP Cable

Flat Cat.6a U/UTP, ISO/IEC 11801 Channel Class Ea, ANSI/EIA/TIA-568 Cat 6A Channel, 500MHz, AWG36, 100% stranded copper, PVC jacket, PoE++ (802.3bt, Type 3 (60 W)), RoHS compliant

Connector Cat.6a

RJ45 shielded plug, pins gold plated, snagless booted

Cable Length

2.5 m / 8.2 ft cover 46 RU: 1.8 m / 6 ft extractable + 0.7 m / 2.3 ft overlength non-retractable

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.31 kg / 0.68 lbs

Packaging Dimensions

Width: 689 mm Height: 50 mm Depth: 47 mm | Width: 27.12 in Height: 1.96 in Depth: 1.85 in


Custom Tariff Number

85444210

Width: 18mm / 0.70 in

Height: 40mm / 1.57 in

Depth: 600 mm / 23.62 in

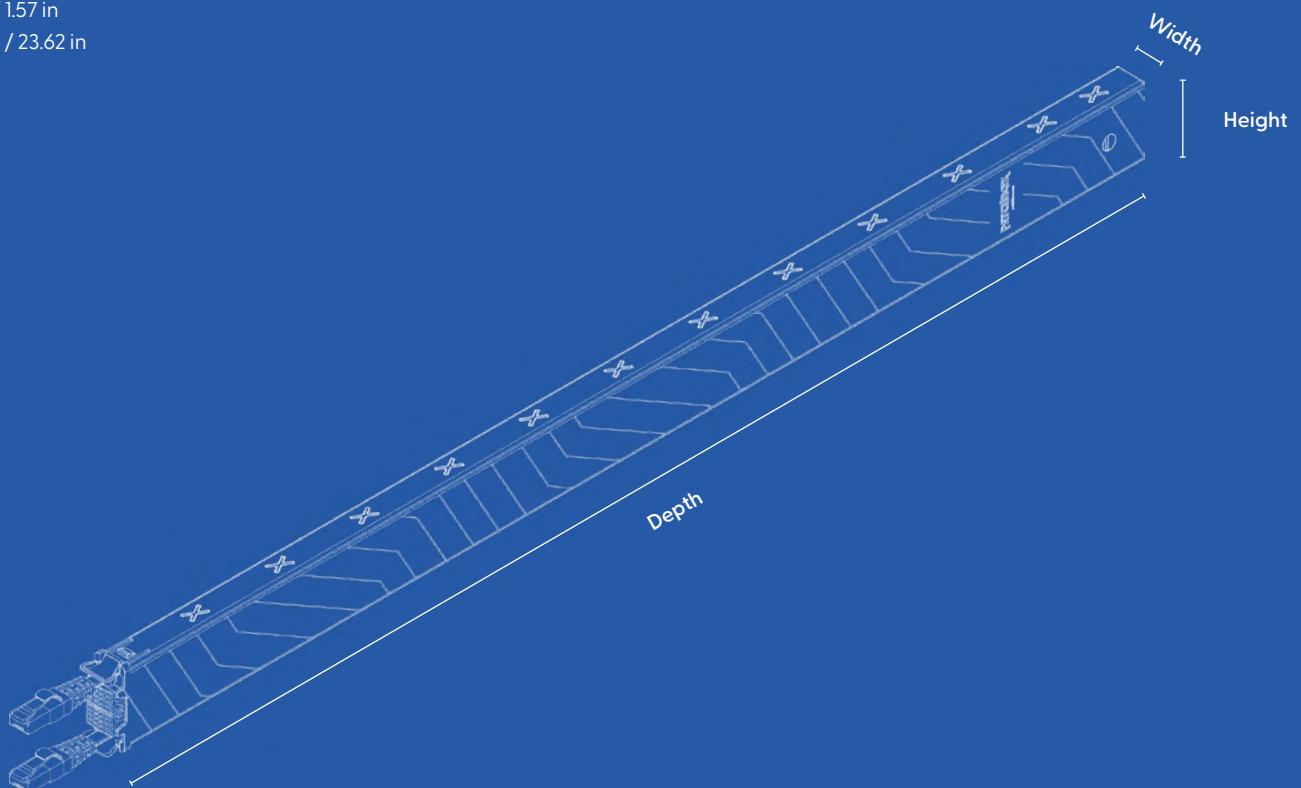


patchbox.one / Cassette / 46RU / Fiber Optic

Build your own patchbox.one with various cable types and colours of your choice! The patchbox.one / Frame offers space for 24 Cable Cassettes. The Fiber Optic cable inside patchbox.one / Cassette / 46RU is 2.5m long and covers up to 46RU. You can decide between OS2 and OM4 and LC-LC and LC-SC connectors.



Items included



24 x Cassette

Technical Information LC-LC

OS2 Cable

OS2 RBS 9 μ /125 μ , G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50 μ /125 μ , LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex – LC Duplex / LC Duplex – SC Duplex

Cable Length

2.5 m / 8.2 ft cover 46 RU: 1.8 m / 6 ft extractable + 0.7 m / 2.3 ft overlength non-retractable

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.28 kg / 0.61 lbs

Packaging Dimensions

Width: 689 mm Height: 50 mm Depth: 47 mm | Width: 27.12 in Height: 1.96 in Depth: 1.85 in


Custom Tariff Number

85447000

Width: 18mm / 0.70 in

Height: 40mm / 1.57 in

Depth: 600 mm / 23.62 in

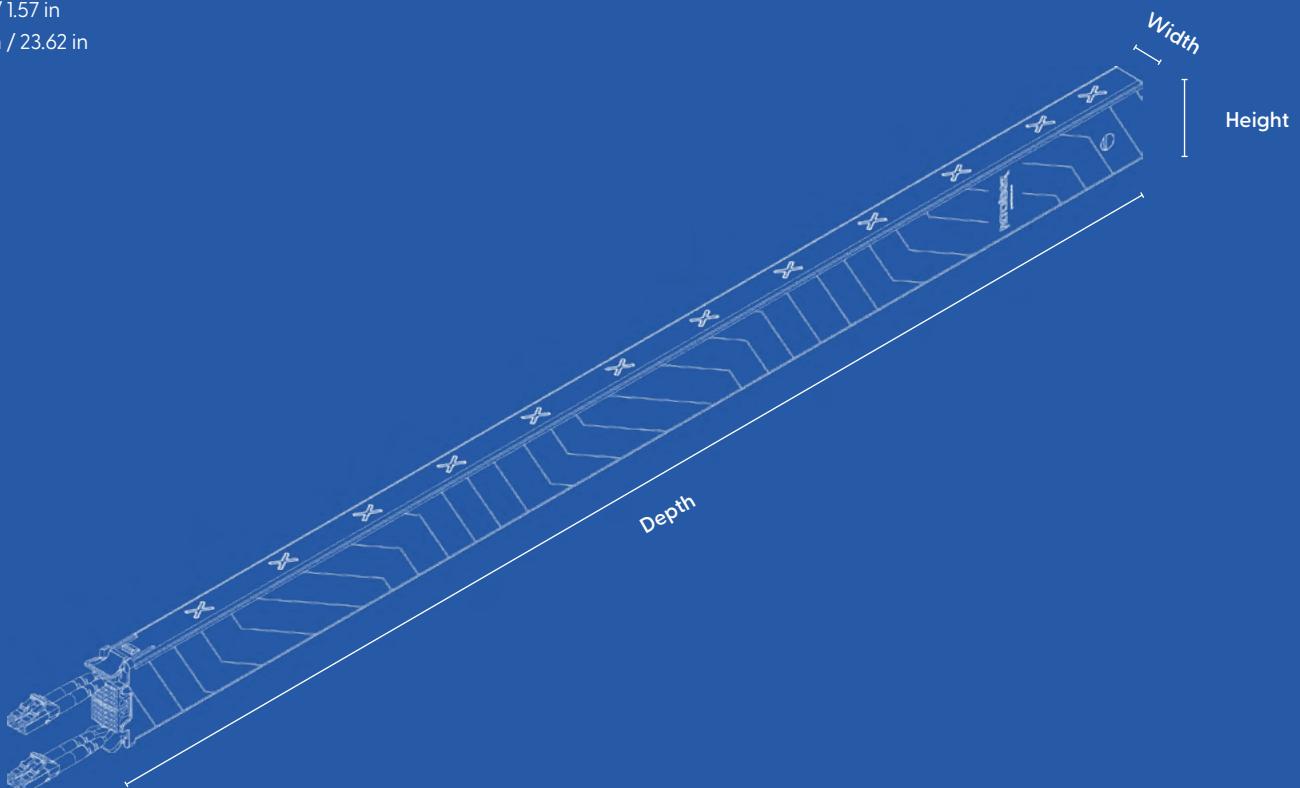

Technical Information LC-SC

OS2 Cable

OS2 RBS 9µ/125µ, G.657.B3, LSZH, Yellow, Single-Mode, RoHS compliant

OM4 Cable

OM4 RBS 50µ/125µ, LSZH, Erika Violet, Multi-Mode, RoHS compliant

Connector

LC Duplex – LC Duplex / LC Duplex – SC Duplex

Cable Length

2.5 m / 8.2 ft cover 46 RU: 1.8 m / 6 ft extractable + 0.7 m / 2.3 ft overlength non-retractable

Cassette Profiles

ABS and RAL9001

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.28 kg / 0.61 lbs

Packaging Dimensions

Width: 689 mm Height: 50 mm Depth: 47 mm | Width: 27.12 in Height: 1.96 in Depth: 1.85 in


Custom Tariff Number

85447000


Width: 18mm / 0.70 in

Height: 40mm / 1.57 in

Depth: 600 mm / 23.62 in

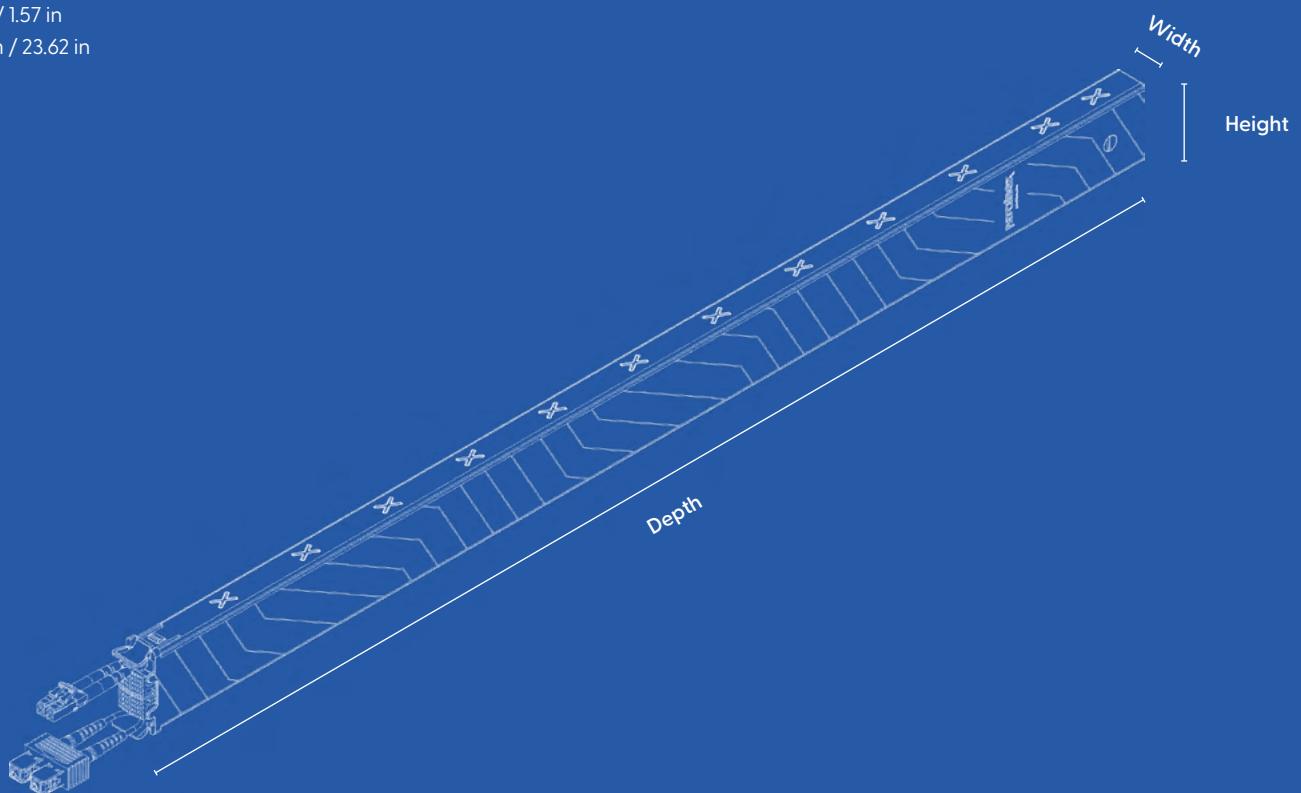


/dev/mount

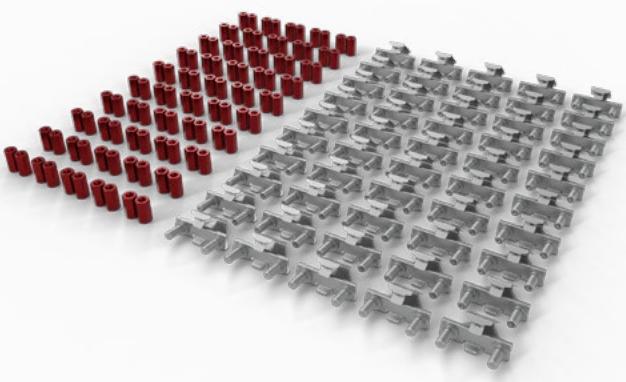


The /dev/mount is the fastest solution replacing conventional cage nuts used in server and network racks. Its faster mounting capabilities increases productivity of mounting 19" equipment. The /dev/mount holds equipment securely in place before the nuts are fastened, making hardware mounting a faster and more secure task.



Items included



50x /dev/mount



100x dual-sided / reversible hex nuts



Technical Information

Materials

Stainless Steel

Gross Weight

0.81 kg / 1.7 lbs

Product Dimensions

Width: 43.32mm Height: 21.54mm Depth: 42.22mm | Width: 1,71 inch Height: 0.85 inch Depth: 1,66 inch

Max. load weight

200 kg / 440 lbs

Ambient Humidity Non-Condensing

10% – 90%

Operating Temperature Range

-40°C – 100°C

Packaging Dimensions

Width: 240 mm Height: 70 mm Depth: 160 mm | Width: 9.44 inch Height: 2.75 inch Depth: 6.29 inch



Custom Tariff Number

73181900

Width: 43.32 mm / 1.71 in

Depth: 42.22 mm / 1.66 in

Height: 21.54 mm / 0.85 in

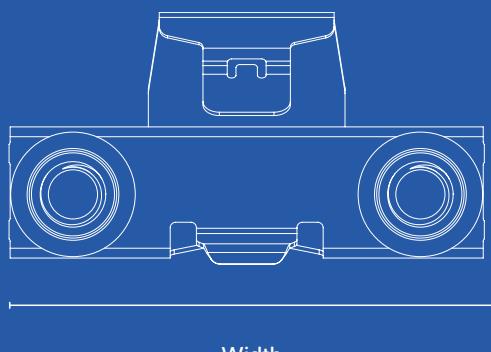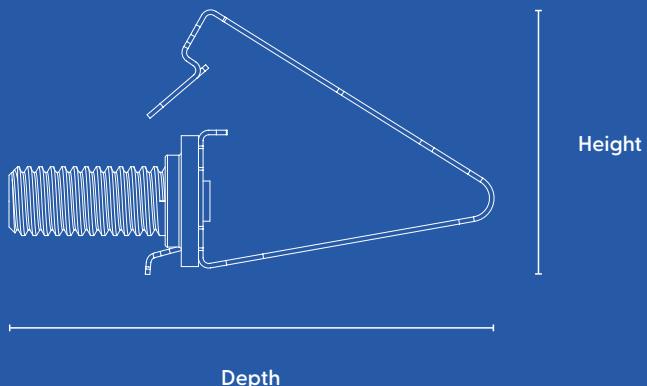


Setup.exe




The Setup.exe enables one technician to do the job of two. The Setup.exe secures the weight of equipment, such as switches, in server and network racks until they are securely screwed in. Mounted inside out of a rack the Setup.exe creates the ideal workspace to place a laptop during configuration or terminating a patch panel. Suitable for threaded holes as well as squared punched holes in 19" racks.

Lifetime Warranty


Items included



1x Setup.exe



1x Threaded holes adapter



1x Squared holes adapter

Technical Information

Materials

Aluminium, stainless steel, powder coated steel

Gross Weight

1.03 kg / 2.27 lbs

Product Dimensions

Width: 465mm Height: 45mm Depth: 53.5mm | Width: 18.30 inch Height: 1.77 inch Depth: 21.06 inch

Max. load weight

50 kg / 110 lbs

Pin sizes

squared holes: 6.5mm | round holes: 3.5mm"

Operating Temperature Range

-40°C – 100°C

Packaging Dimensions

Width: 510 mm Height: 55 mm Depth: 600 mm | Width: 20.07 inch Height: 2.16 inch Depth: 23.62 inch

Custom Tariff Number


82055980

Width: 465 mm / 18.30 in

Height: 45 mm / 1.77 in




Patchcatch Solo

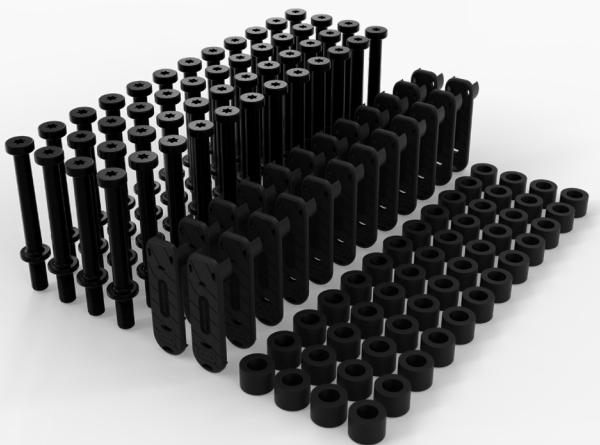


The Patchcatch Solo is ORU Cable Management Tool that fastens your device while at the same time managing your cables. One 24-Pack replaces 48 conventional cage nut screws as well as 12 cable managers, therefore allowing you to use up to 50% more rack space. Ideal for server cabinets with limited space around the rails, the Patchcatch Solo enables you to manage your cables on the front sides of the rack without wasting a rack unit. The Patchcatch Solo is compatible with conventional M6 cage nuts, the PATCHBOX /dev/mount, and the Mounting Rails of the patchbox.one. One 24-pack of Patchcatch Solo allows you to manage cables and fasten hardware of 12 rack units.



Items included



48 x Patchcatch Solo



48 x Patchcatch Solo Spacer



24 x Patchcatch Solo Clips



Technical Information

Materials

Steel and plastic POM

Gross Weight

0.81 kg / 1.78 lbs

Packaging Dimensions

Width: 200 mm Height: 60 mm Depth: 90 mm | Width: 7.87 in Height: 2.36 in Depth: 3.54 in

Max. load weight

250 kg / 551 lbs

Assembly Depth

13 mm x 43 mm x 56 mm | 0.51 in x 1.69 in x 2.20 in

Operating Temperature Range

-40°C – 100°C

Ambient Humidity Non-Condensing

10% – 90%


Custom Tariff Number

73181900

Width: 13 mm / 0.51 in

Depth: 61 mm / 2.40 in

Height: 43 mm / 1.69 in

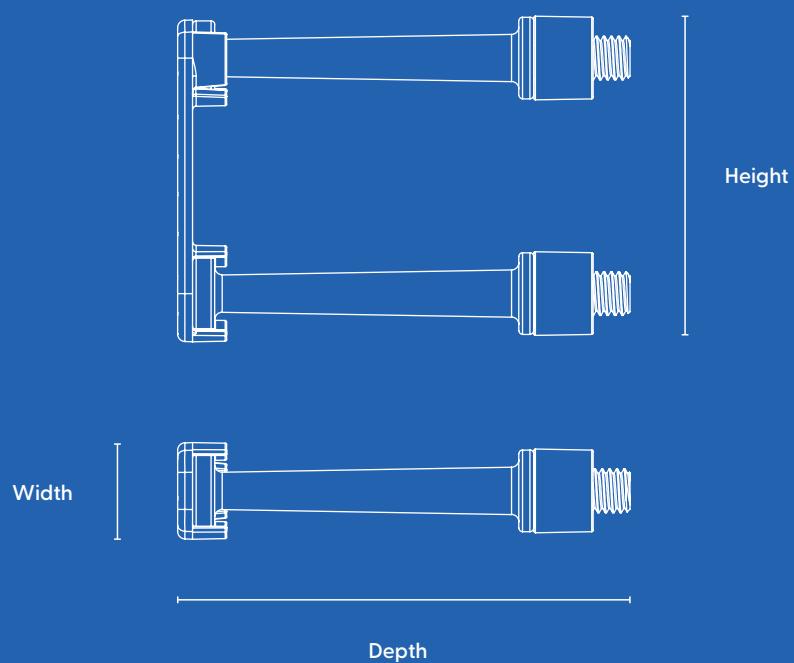

patchbox.one / Patchcatch

The Patchcatch is our ORU cable organizer for your network rack. Stop wasting precious rack units with horizontal or vertical cable managers. Use the innovative Patchcatch for optimal cable management. Simply guide the cables to the side of the RU they are patched to, to keep the rack nice and tidy. Four pieces are included in one pack.



Items included



4 x Patchcatch



Technical Information

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.06 kg / 0.13 lbs

Packaging Dimensions

Width: 100 mm Height: 40 mm Depth: 95 mm | Width: 3.93 in Height: 1.57 in Depth: 3.74 in


Custom Tariff Number

39269097

Width: 50 mm / 1.96 in

Depth: 58 mm / 2.28 in

Height: 51 mm / 2 in

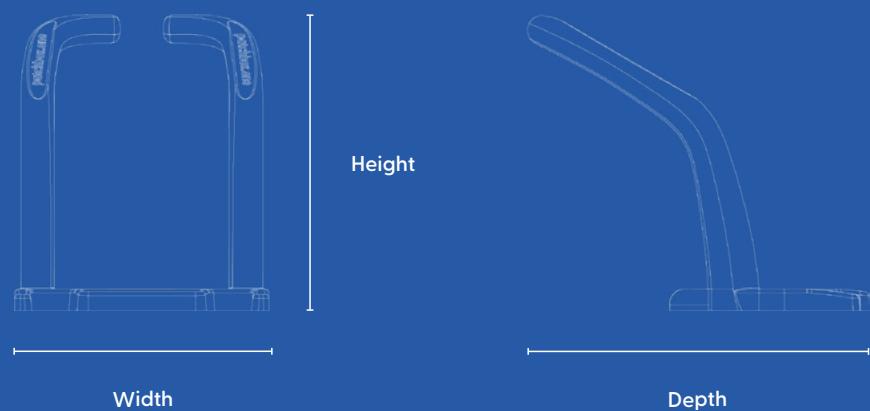


patchbox.one / Blind Panels

The Blind Panels can cover up unused slots from your patchbox. one. This ensures air circulation remains optimised and keeps the temperature in your network cabinet in balance. Simply clip them into the frame and reuse them anytime in another slot. Ten pieces are included in one pack.



Items included



10 x Blind Panel



Technical Information

Plastic Parts

Polyoxymethylene POM

Operating Temperature Range

-20°C – 60°C

Ambient Humidity Non-Condensing

10% – 90%

Gross Weight

0.06 kg / 0.13 lbs

Packaging Dimensions

Width: 100 mm Height: 40 mm Depth: 95 mm | Width: 3.93 in Height: 1.57 in Depth: 3.74 in


Custom Tariff Number

39269097

Width: 17 mm / 0,66 in

Depth: 26 mm / 1.02 in

Height: 43 mm / 1.69 in

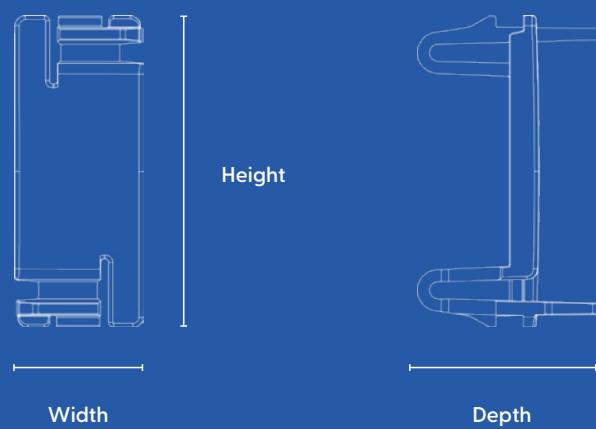



patchbox.one / ID-Labels

The patchbox.one / ID-Labels set contains 432 printable stickers on 3 A4 sheets, made for labelling up to 9 patchbox.one systems. The labels are applied directly to the cable stoppers and help improve cable management and documentation. Labels can be customized using our printable template, making it easy to identify and track connections.

Items included

3 x A4 Sheet



Technical Information

Scope of Delivery

3x A4 Label Sheet

Gross Weight

73 g / 0.16 lbs

Packaging Dimensions

Width: 260 mm Height: 350 mm | Width: 10.23 in Height: 13.77 in

Product Dimensions


Width: 210 mm Height: 297 mm | Width: 8.26 in Height: 11.69 in

Custom Tariff Number

48211010

Width: 13,82 mm / 0.54 in

Height: 9,81 mm / 0.38 in





PATCHBOX GmbH
Handelskai 94-96 / 271
1200 Vienna / Austria

sales@patchbox.com
+43 1 99 71 960

patchbox.com
shop.patchbox.com
